



Hot stamping (1.5 GPa, 2.0 GPa) Continuous flange parts

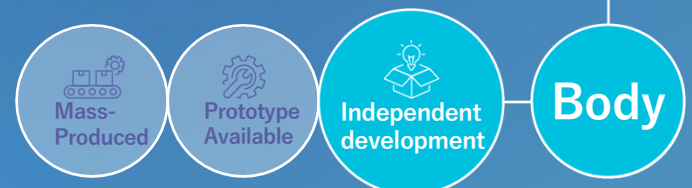


Product Features

- Improved Safety (Collision Performance): A continuous flange structure is adopted for the side sill joint, eliminating the need for notches (partial cuts).
- Improved Production Efficiency (Parts Integration): The conventional three-part component is integrated into a single molded part, reducing the number of parts and labor.

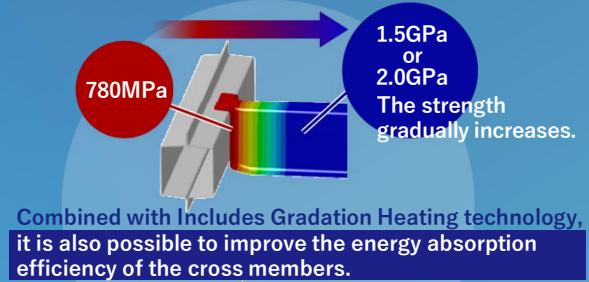

Effects

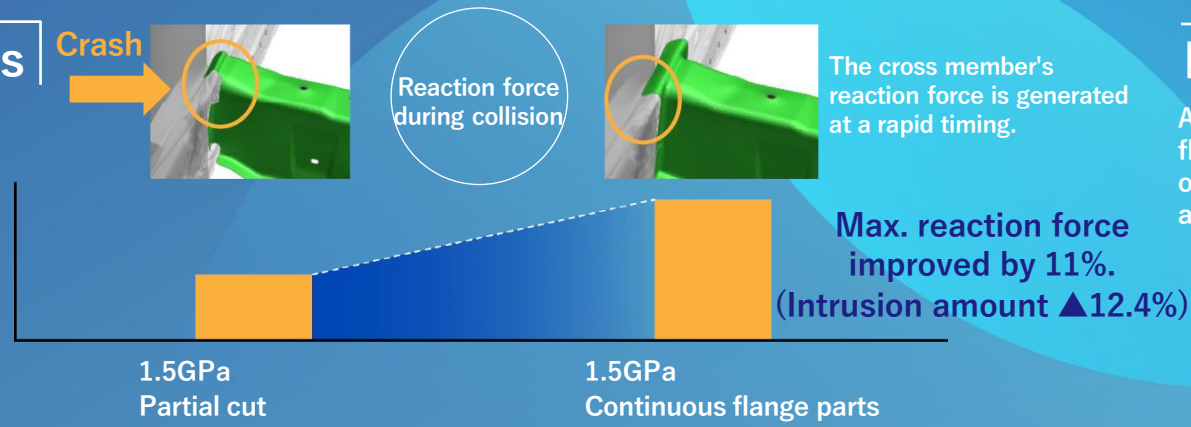

Product Technology

Achieved ultra-deep continuous flange forming with a 90° angle on both sides of the product and a product depth of 145mm.

